


Ideal for pumping storm water, emptying sumps, septic effluent disposal, water transfer and pumping light slurries and factory waste.

Features

- double mechanical shaft seal in oil bath with hard faced silicon carbide/ceramic seal on pump side
- open single channel impeller
- automatic resetting thermal overload.



Dimensions (all measurements mm)

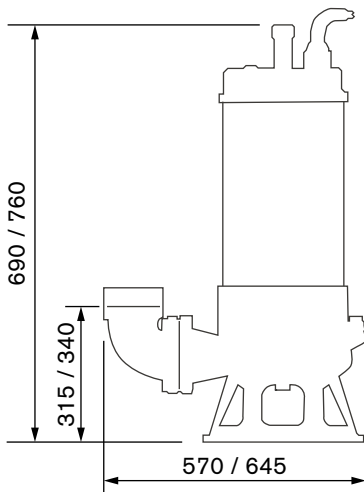

Technical data

Model GPV	100-550	100-750
Outlet (mm)	100 BSP flanged bend	
Max flow rate (L/s)	25	36
Max head (m)	22.5	32.5
Max liquid temperature (°C)	40	
∅ Solids (mm)	80	
Power (kW)	5.5	7.5
Current (A)	12.3	16.5
Voltage (V)	415	
Speed (RPM)	2900	
Casing	Cast iron	
Impeller	Cast iron	
Motor housing	Stainless steel	
Protection	IP68	
Cable details	10 m length, H07 RN-F	
Guide rail kit	Option	
Weight (kg)	85	90

Performance curve

